

MEAS EMITTER ASSEMBLY ELM-5000 SERIES

SMT optical sensor component

- Dual Drive
- Pulse Oximetry Component
- Clear Epoxy
- Reflow Solderable

Low oxygen level can put a strain on cell functioning including the heart and brain. This is critical in acute medical situations like post-op recovery. TE Connectivity's (TE) Surface Mounted Technology (SMT) optical components provide leading accuracy in oxygen level detection.

With more than 27 years of proven reliability and expertise, TE has designed SMT sensors with best-in-class flexibility to accommodate multiple wavelength options.

Our ability to provide both components and complete sensor packages makes us a leading choice for pulse oximetry applications that require high degrees of precision, durability and performance.

Emitter Assembly ELM-5000 series are specially designed for medical applications where selection of peak wavelength and reflow solderability are key requirements. Emission source material is GaAIAs in conjunction with GaAlP complete with clear epoxy lens.

MEAS EMITTER ASSEMBLY ELM-5000 SERIES

SMT Optical Sensor Component


Features

- 660 nm ± 3 nm Peak Wavelength Red LED
- Two IR Wavelength Choices
- Dual Drive

Applications

- Pulse Oximetry
- SpO₂ Finger/Ear Reusable Probes
- SpO₂ Disposable Strip or Butterfly Probes

Dimensions (unit: mm)

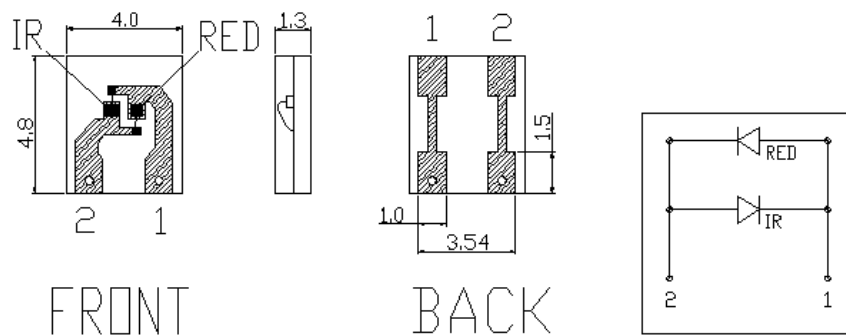

RED 660nm

Parameter @ 25°C	Symbol	Conditions	Min.	Typ.	Max.	Absolute	Unit
Forward Voltage	V_F	$I_F=20\text{mA}$		1.8			V
Reverse Voltage	V_R	$I_R=10\mu\text{A}$	5				V
Power	P_o	$I_F=20\text{mA}$	1.2				mW
Peak Wavelength	λ_p	$I_F=20\text{mA}$	660	663	666		nm
Spectral Bandwidth	$\Delta\lambda$	$I_F=20\text{mA}$		20			nm

INFRARED 890nm (ELM-5001)

Parameter @ 25°C	Symbol	Conditions	Min.	Typ.	Max.	Absolute	Unit
Forward Voltage	V_F	$I_F=20\text{mA}$			1.50		V
Reverse Voltage	V_R	$I_R=10\mu\text{A}$	5				V
Power	P_o	$I_F=20\text{mA}$	1.0				mW
Peak Wavelength	λ_p	$I_F=20\text{mA}$	880	890	900		nm
Spectral Bandwidth	$\Delta\lambda$	$I_F=20\text{mA}$		75			nm

MEAS EMITTER ASSEMBLY ELM-5000 SERIES

SMT Optical Sensor Component

INFRARED 905nm (ELM-5002)

Parameter @ 25°C	Symbol	Conditions	Min.	Typ.	Max.	Absolute	Unit
Forward Voltage	V_F	$I_F=20\text{mA}$		1.26			V
Reverse Voltage	V_R	$I_R=10\mu\text{A}$	5				V
Power	P_o	$I_F=20\text{mA}$	1.0				mW
Peak Wavelength	λ_p	$I_F=20\text{mA}$	895	905	915		nm
Spectral Bandwidth	$\Delta\lambda$	$I_F=20\text{mA}$		70			nm

NOTES:

Operation Temperature: -20 to 80°C

Storage Temperature: -30 to 80°C

Moisture Protection: Components must be baked at 120°C for 72 hours before use and used up within 8 hours after baking

Reflow soldering temperature: Max. Temperature Range: 230 – 250°C

Ordering Information

Description	Model	Part Number
Emitter Assembly; SMT Optic; 660nm/890nm	ELM-5001	10104043-20
Emitter Assembly; SMT Optic; 660nm/905nm	ELM-5002	10104018-20